



# STS-22 Series

## AUTOMATED LAUNDRY WRAPPERS

## SHRINK TECH SYSTEMS

Models 17, 22, 30

[www.shrinktechsystems.com](http://www.shrinktechsystems.com)

IDEAL FOR FLAT WORK WRAPPING LINES



### EXCLUSIVE PATENTED


### "UNIVERSAL" SIDE SEAL

WITH "INTEGRATED" SOLID KNIFE CROSS SEAL. SEALING AREA IS PROTECTED BY INTERLOCKED SAFETY SWITCHES AND PROTECTIVE GUARDING




### OPERATOR COMMAND CENTER

FEATURES A TWO LINE L.E.D. DISPLAY WITH 5 BUTTON DIRECT ACCESS MACHINE CONTROL FOR SIMPLE SETUP. THE COMMAND CENTER ALSO HAS A 3 LEVEL OPERATIONS MODE AND IS CAPABLE OF STORING 4 PRESET PROGRAMS.

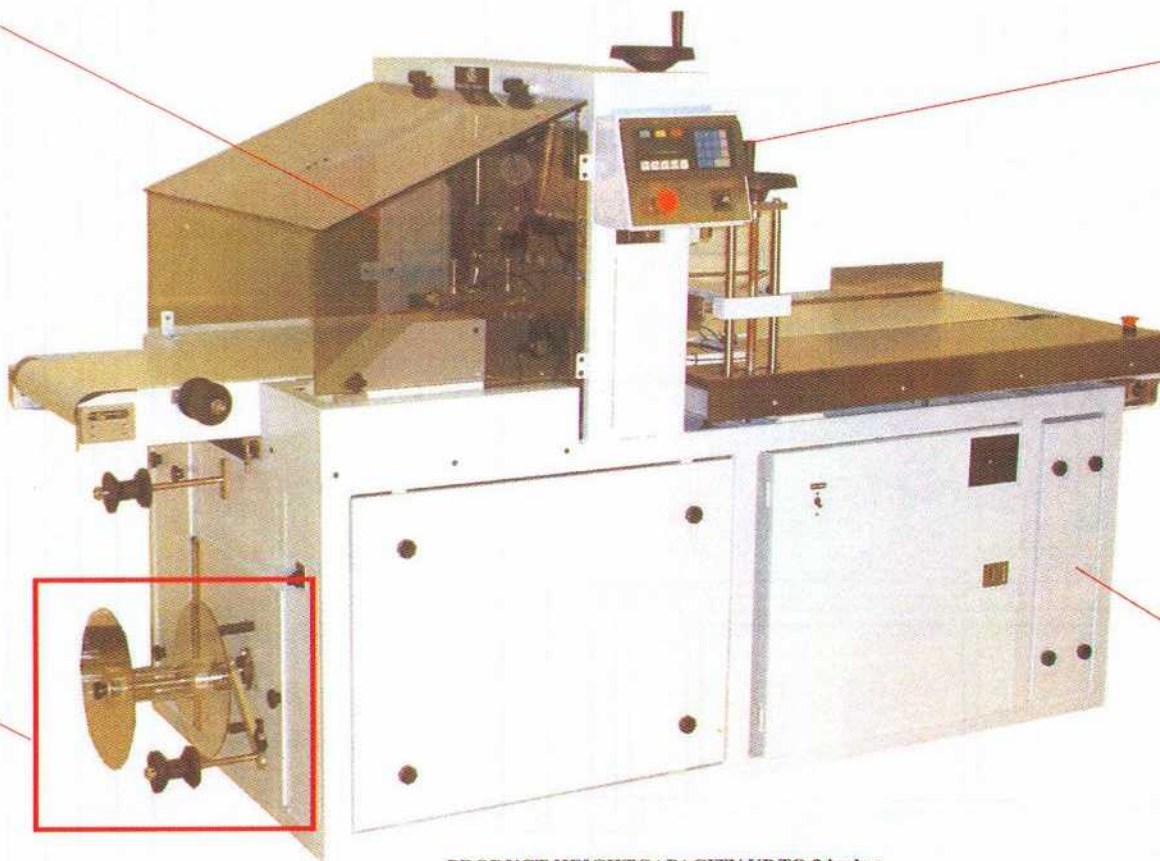

### FILM SCRAP SYSTEM

SELF COMPENSATING SCRAP REWIND INCORPORATES A VARIABLE SPEED DRIVE TO AUTOMATICALLY MATCH THE MACHINESPEED



### ELECTRONIC HOLE PUNCH

ALLOWS FOR PRECISE CONTROL OF AIR EVACUATION HOLE SIZES AND NUMBER OF HOLES PER PACKAGE. INCLUDED EASY LOAD FILM CRADLE WITH HEAVY DUTY FILM SEPARATOR

PRODUCT HEIGHT CAPACITY UP TO 9 inches  
INFINITE LENGTH CAPABILITY  
ALL ADJUSTMENTS HAVE CORRESPONDING SCALES FOR EASE OF PRODUCT CHANGEOVER



Manufactured  
In the U.S.A.

1226 AMBASSADOR BLVD. SAINT LOUIS, MISSOURI 63132 PH: 314.997.4259 FAX: 314.995.7006

STS SHRINK TECH SYSTEMS L.L.C.  
 1226 AMBASSADOR DRIVE  
 ST. LOUIS, MO. 63132  
 PN. 314-997-4259 / FAX 314-995-7006

SCALE: NONE

DATE: 6/23/00

DRAWN BY: DARYL F.

SHEET NO.: 1 OF 1

TITLE:

STS WRAPPER DIMENSIONAL SPECS

MODEL: STS-17, STS-22, STS-30

PHYS. REQ. 120 VOLTS. 15 AMPS. / 100 PSI.

MODEL	A	B	C	D	E	F	G	H
STS-17	89	66	35-38"	58.5-61.5"	37"	44"	52"	30.5"
STS-22	105	77.5	35-38"	58.5-61.5"	42"	49"	61"	35.25"
STS-30	115	85.5	35-38"	58.5-61.5"	50"	57"	74.5"	43"

