



STS -2212 Series

SHRINK TUNNELS

Models 22, 30

SHRINK TECH SYSTEMS

www.shrinktechsystems.com



DIGITAL TEMPERATURE CONTROL
LED READ OUT WITH "COOL DOWN"
THAT AUTOMATICALLY SHUTS
THE SYSTEM OFF

VARIABLE SPEED CONTROL

VARIABLE SPEED CONVEYOR CONTROL
AND SIX HEATERS COILS
WITH HI-LOW FAN SPEED CONTROLS



VIEWING WINDOW
WITH LIGHTED CHAMBER
TO MONITOR PERFORMANCE



SHRINK CHAMBER
Convection Shrink Chamber
That Optimizes Film Capabilities

CONVEYOR OPTIONS:
TEFLON MESH BELT
STAINLESS STEEL BELT

HEAVY DUTY LEGS
ADJUSTABLE LEG EXTENSION
WITH LOCKING CASTERS

Distributed by: Miller/Bevco www.MillerBevco.com
800-821-2177/ fax: 816-561-8595
email: Sales@MillerBevco.com
for over 44 years offering Unique Packaging Solutions



1226 AMBASSADOR BLVD. SAINT LOUIS, MISSOURI 63132 PH: 314.997.4259 FAX: 314.995.7006





STS SHRINK TECH SYSTEMS L.L.C.
 1226 AMBASSADOR DRIVE
 ST. LOUIS, MO. 63132
 PN. 314-997-4259 / FAX 314-995-7006

SCALE: NONE
 DATE: 6/23/00
 DRAWN BY: DARYL F.
 SHEET NO.: 1 OF 1

TITLE: STS TUNNEL DIMENSIONAL SPECS
 MODEL: STS 1712/4, 2212/4, 3012/4
 PWR. REQ. SEE ELECTRICAL REQ.

MODEL	A	B	C	D	E	F	G	H
STS 1712/4	48"	72"	35-38"	51"-54"	58"-61"	27"	20"	12"
STS 2212/4	48"	72"	35-38"	51"-54"	58"-61"	32"	25"	12"
STS 3012/4	48"	72"	35-38"	51"-54"	58"-61"	40"	32"	12"

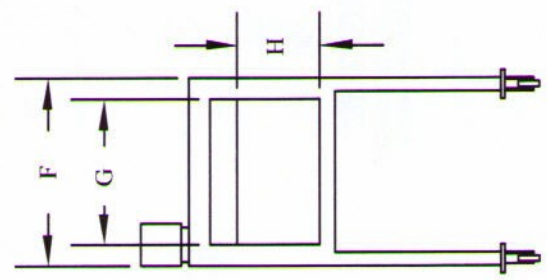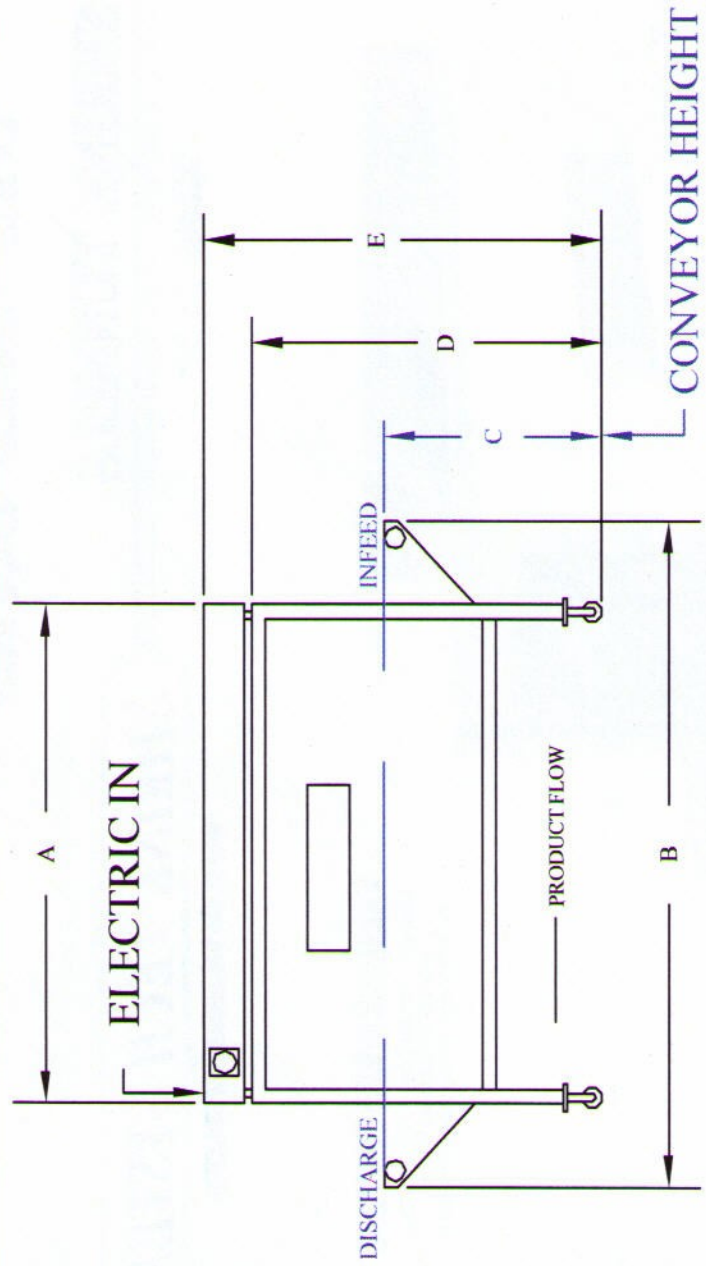

ELECTRICAL REQ.
 1712/4 220v 1ph. 48amps or 220v 3ph. 28amps
 2212/4
 3012/4 - 220v 3ph. 50amps