


StrapPack®

Publication Strapping Machine

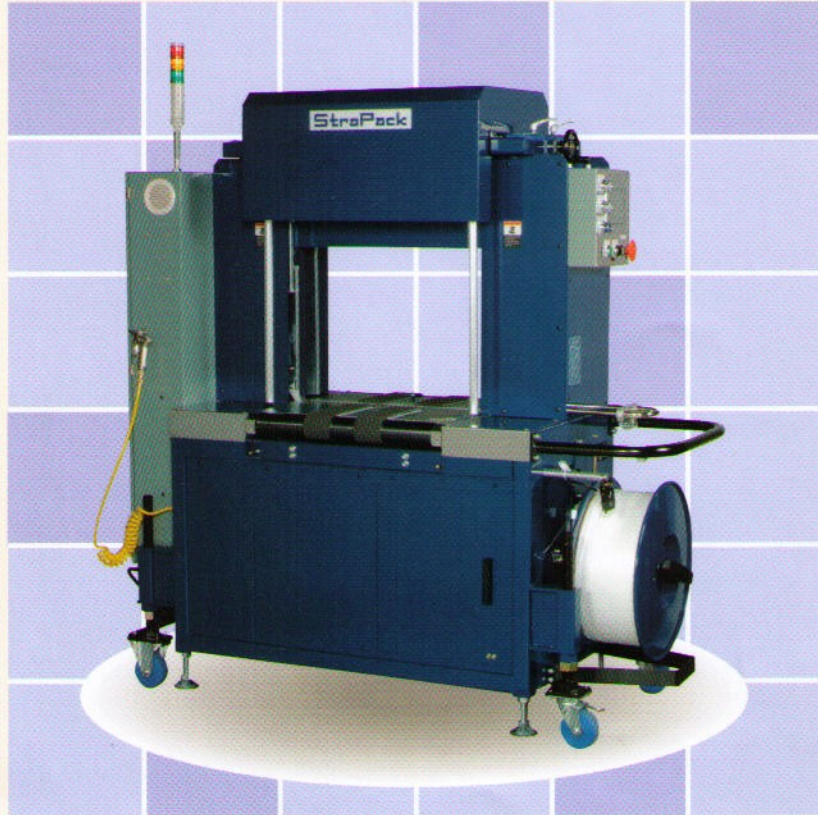

■ Speed

At 54 cycles per minute, the RQ-8N is among the fastest strapping machines made. It can process 40 bundles of newspapers per minute.

■ Automatic Strap Ejection

If a strap feeding problem occurs, the problem section of strap is automatically cut and ejected.

■ Touch Panel Operation

The touch panel makes it easy to set the compression, timers of gates and guides. Production data is also available.

■ Conveyor Speed Inverter Control

The speed of the conveyor can be easily adjusted. The inverter provides adjustment of speed, acceleration and deceleration.

RQ-8N

■ Standard Specifications

Dimensions	Width	1628mm	64" in.
	Height	1830mm	72" in.
	Depth	631.5mm	24-7/8 in.
	Weight	Approx. 420kg	924 lbs.
Table Height		820mm	32-1/4 in.
Minimum Package Size		W200×50Hmm	W7-3/4 in H2 in.
Maximum Package Size		W500×400Hmm	W19-1/2 in H15-3/4 in.
Speed		54 straps/min	
Strap Width		Polypropylene	
		5,6mm	1/4 in.
Power Supply		220, 240, 440, 460, 480V Three Phase 50 / 60Hz	

Pats., U.M. & design registered and/or pending.
Modification rights reserved.

© 2005 Strapack Corporation

DISTRIBUTED BY:

MILLER / BEVCO
www.MillerBevco.com
13604 West 107th Street
Lenexa, KS 66215

913-322-6800 1-800-821-2177 Fax #913-322-1729

STRAPACK CORPORATION
7-16-14, Ginza Chuo-ku Tokyo 104-0061, JAPAN
Phone 81-3-6278-1805 Fax. 81-3-6278-1806
(URL) <http://www.strapack.com> (E-mail) info@strapack.com
STRAPACK INC.
30860 San Clemente St. Hayward, CA 94544 U.S.A.
Phone 1-510-475-6000 Fax. 1-510-475-6090
STRAPACK, N.V./S.A.
Uilenbaan 200, 2160 Wommelgen, BELGIUM
Phone 32-3-355-1520 Fax. 32-3-355-1521