




Case Sealer

LD-3SB

Case Sealing for the Real World

This reliable case sealer for industrial environments seals a wide range of uniform cases.

Little David delivers packaging equipment that works for you



Perfect for high profile, lightweight, unstable, narrow boxes



The LD-3SB offers:

- ☒ Low maintenance
- ☒ Quick changeover
- ☒ Proven side belt
- ☒ Simple operation
- ☒ Interchangeable tape cartridges
- ☒ Heavy duty steel construction
- ☒ Reliable operation

The LD-3SB replaces:

- ☒ Expensive labor
- ☒ Hand taping boxes
- ☒ Unsafe machinery

Little David LD-3SB



LITTLE DAVID




www.MillerBevco.com

LD-3SB

Dimensions:


LD-3SB:

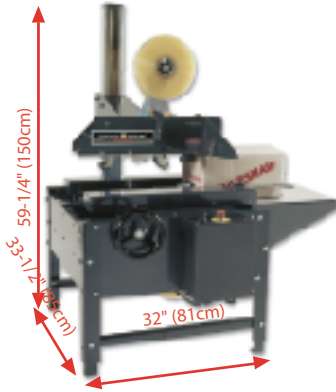

Additional Case Sealer Models:

Also Available Uniform Legend:

- Semi-automatic case sealer
- Seals top and bottom of uniform box sizes



Also Available SP-304:

- Semi-automatic case sealer
- Seals top and bottom of uniform sized boxes



Distributor Information:



6209 Richards Drive
Shawnee, Kansas 66216
800-821-2177/ Fax: 913-322-1729
Info@MillerBevco.com
www.MillerBevco.com

Features of the LD-3SB:

Reliable Performance - Warranty:

- 2 Years Gear Reducer and motor
- 3 Years Cartridge*

*Moving and wear parts are not included. Other restrictions may apply. Consult Loveshaw or your authorized Little David® Distributor for details

Flexible:

- Tapes boxes from 4-1/2" (114mm) to 24" (610mm) in height
- Uses pressure sensitive tape

Easy Operation:

- Plug in operation
- Minimal operator training required
- Sealed drive system
- CaseLocker ST® tape cartridge requires no lubrication
- Self-centering belts

Safe:

- Single mast design allows clear access
- Knife guard system of the CaseLocker ST® tape cartridge only allows the blade to be exposed only when the rollers have been depressed

Specifications of the LD-3SB:

Power Requirements:

- 110 VAC, single phase, 60 cycle

Note: Other voltages available. Contact Loveshaw for details.

Operating Speed:

- Continuous belt drive; 72' per minute (21.9 m/min.)
(production rate depends on box size & operator dexterity)

Weight:

- 230 lbs (104 kg) uncrated

Case Capacity: (with 2" wide CaseLocker ST® Cartridge)

- | | |
|------------------------|----------------------|
| ■ Minimum: | Maximum: |
| Height: 4-1/2" (114mm) | Height: 24" (610mm)* |
| Width: 4" (102mm) | Width: 20" (508mm) |
| Length: 3" (76mm) | Length: infinite |
- *High mast version accommodates box heights to 34" (864mm)

Options of the LD-3SB:

- Casters
- Leg adjustments
- High mast for box heights to 34" (864mm)
- Front and rear standard or roller pack table
- NEMA 4, NEMA 7
- Stainless steel
- 3-1/4" narrow box width option available

LOVESHAW
an ITW Company

MillerBevco 6209 Richards Dr.
Shawnee, Kansas 66216
Tel: (913) 322-6800 Fax: (913)
322-1729 (800) 821-2177

LOVESHAW Europe
A Division of ITW Ltd.

Unit 9 Brunel Gate
West Portway Industrial Estate
Andover, Hampshire England SP 10 3 SL
Tel: (1264) 357511 Fax: (1264) 355964

